



SSCN491GS6

NPN Switching Transistor

➤ Features

VCB	VCE	VEB	IC
80V	60V	5V	1000mA

➤ Description

The NPN Transistor is designed for use in linear and switching applications. The device is housed in the SOT-23 package, which is designed for telephony and professional communication equipment.

➤ Applications

- Amplifying signal
- Electronic switch
- Oscillating circuit
- Variable resistance


➤ Ordering Information

Device	Package	Shipping
SSCN491GS6	SOT-23	3000/Reel


➤ Pin configuration



SOT-23

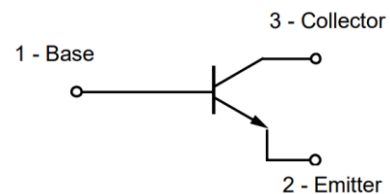

Circuit Diagram



Marking(Top View)



➤ **Absolute Maximum Ratings**($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CB0}	80	V
Collector- Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current-Continuous	I_C	1	A
Peak Collector Current	I_{CM}	2	A
Collector Power Dissipation	P_C	250	mW
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	500	$^{\circ}\text{C}/\text{W}$
Junction Temperature	T_J	-55 to 150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 to 150	$^{\circ}\text{C}$

➤ **Electrical Characteristics** ($T_A=25^{\circ}\text{C}$ unless otherwise noted)









Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C=100\mu\text{A}, I_E=0$	80			V
Collector-emitter Breakdown Voltage	BV_{CEO}	$I_C=10\text{mA}, I_B=0$	60			V
Emitter -Base Breakdown Voltage	BV_{EBO}	$I_E=100\mu\text{A}, I_C=0$	5			V
Collector Cutoff Current	I_{CBO}	$V_{CB}=60\text{V}, I_E=0$			0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=4\text{V}, I_C=0$			0.1	μA
DC Current Gain	h_{FE}^1	$V_{CE}=5\text{V}, I_C=1\text{mA}$	100			
		$V_{CE}=5\text{V}, I_C=500\text{mA}$	100		300	
		$V_{CE}=5\text{V}, I_C=1\text{A}$	80			
		$V_{CE}=5\text{V}, I_C=2\text{A}$	30			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}^1$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.25	V
		$I_C=1\text{A}, I_B=100\text{mA}$			0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}^1$	$I_C=1\text{A}, I_B=100\text{mA}$			1.1	V
Transition frequency	f_T	$V_{CE}=10\text{V}, I_C=50\text{mA}$ $f=100\text{MHz}$	150			MHz
Collector output capacitance	C_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$			10	pF

Notes:



1. Measured under pulsed conditions, Pulse width=300 μs , Duty cycle \leq 2%.



➤ Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

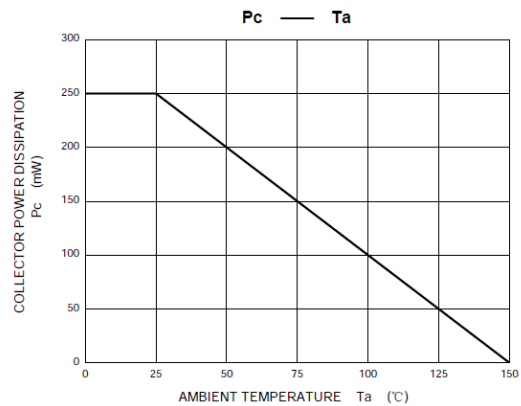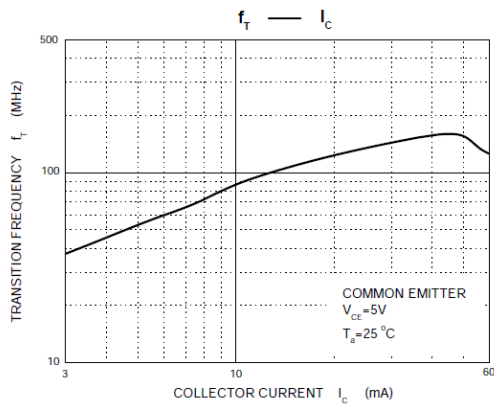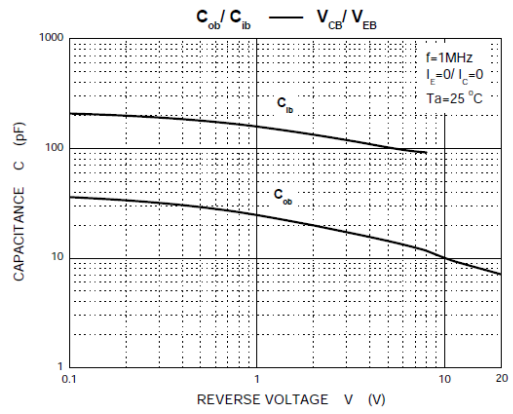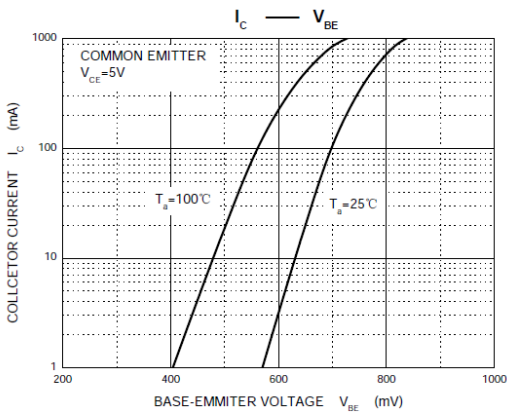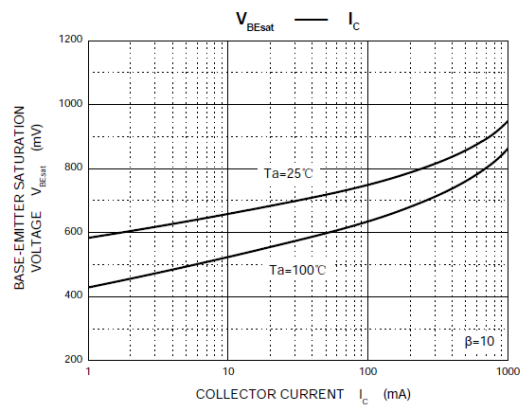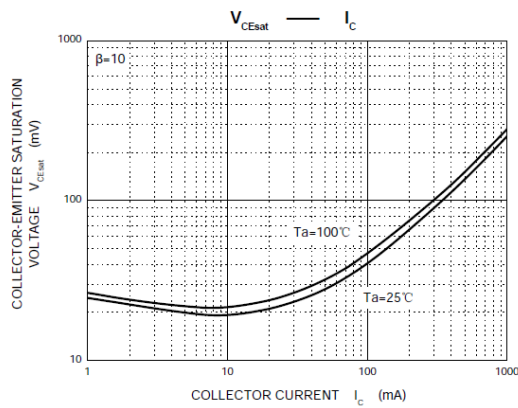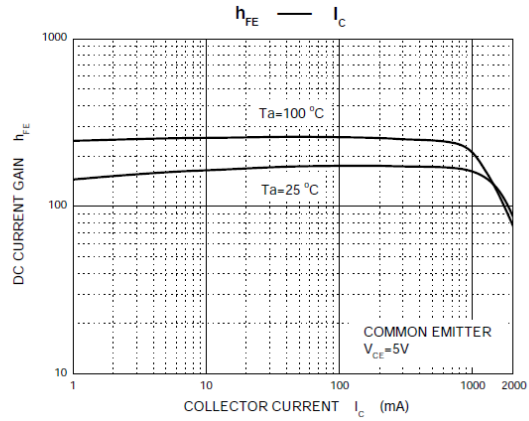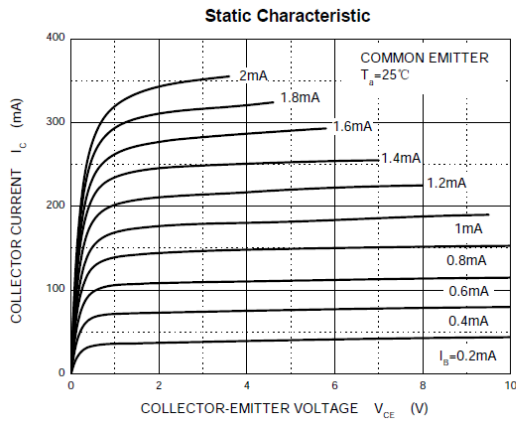


● Package Information

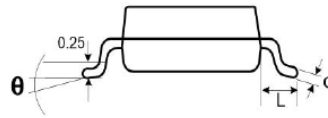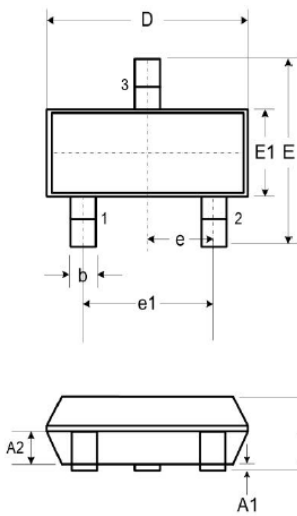

DIM	Millimeters		
	Min.	Typ.	Max.
A	0.89	-	1.12
A1	0.01	-	0.10
A2	0.88	0.95	1.02
b	0.30	-	0.51
c	0.08	-	0.18
D	2.80	2.90	3.04
E	2.10	2.37	2.64
E1	1.20	1.30	1.40
e	0.95		
e1	1.90		
L	0.40	0.50	0.60
L1	0.55		
N	3		
θ	0°	-	8°

Recommended Pad outline(Unit: mm)

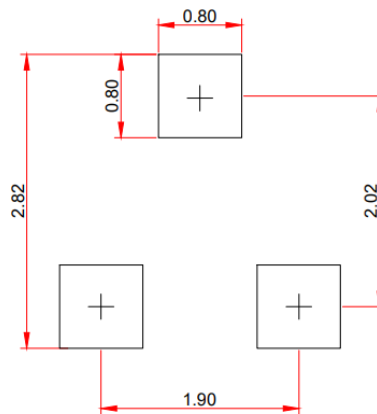



DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.