



SSCE5V011SG

5-Line TVS Diode Array for ESD Protection

● Description

The SSCE5V011SG provides a typical line to line capacitance of 0.3pF and low insertion loss up to 3GHz providing greater signal integrity making it ideally suited for USB 3.0 applications, such as Digital TVs, DVD players, Computing, set-top boxes and MDDI applications in mobile computing devices.

It has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).


● Feature

- ✧ 75W peak pulse power ($t_P = 8/20\mu s$)
- ✧ SOT-363 Package
- ✧ Working voltage: 5V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ RoHS compliant
- ✧ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 25kV$
 - Contact discharge: $\pm 20kV$
 - IEC61000-4-5 (Lightning) 5A (8/20 μs)


● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17 μm
- ✧ Pin flatness: $\leq 3mil$


● PIN configuration



SOT-363



Circuit diagram



Marking (Top View)


● Applications

- ✧ Digital Visual Interface (DVI)
- ✧ 10/100/1000 Ethernet
- ✧ USB 1.1/2.0/3.0/4.0/OTG
- ✧ IEEE 1394 Firewire Ports
- ✧ Projection TV Monitors and Flat Panel Displays
- ✧ Notebook Computers
- ✧ Set Top Box
- ✧ Projection TV



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

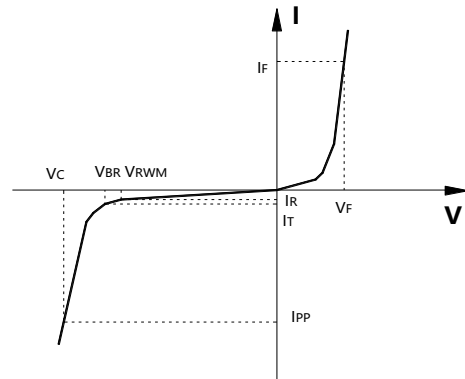

● Absolute maximum rating @ $T_A=25^{\circ}C$


Parameter	Symbol	Value	Units
Peak Pulse Power (8/20 μ s)	P_{PP}	75	W
Peak Pulse Current (8/20 μ s)	I_{PP}	5	A
ESD Rating per IEC61000-4-2: Contact	V_{ESD}	20	kV
Air		25	
Storage Temperature	T_{STG}	-55/+150	$^{\circ}C$
Operating Temperature	T_J	-55/+125	$^{\circ}C$

● Electrical Characteristics @ $T_A=25^{\circ}C$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}	Any I/O to GND			5	V
Breakdown Voltage	V_{BR}	$I_T = 1mA$ Any I/O to GND	6		9	V
Reverse Leakage Current	I_R	$V_{RWM} = 5V$			0.5	μA
Clamping Voltage	V_C	$I_{PP} = 1A, t_P = 8/20\mu s$			10	V
Clamping Voltage	V_C	$I_{PP} = 5A, t_P = 8/20\mu s$			15	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz,$ between I/O pins		0.3	0.4	pF
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz,$ any I/O pin to GND			0.8	pF




● Typical Performance Characteristics

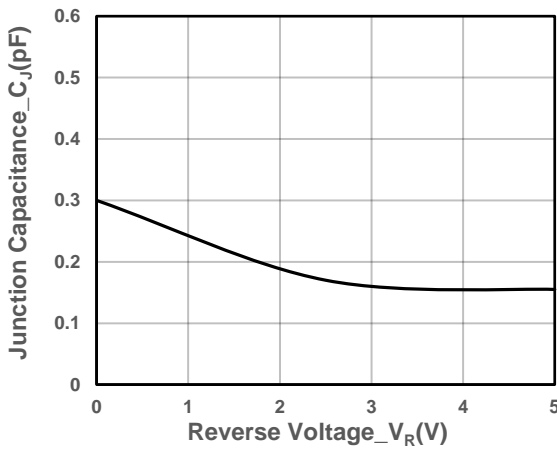


Junction Capacitance vs. Reverse Voltage

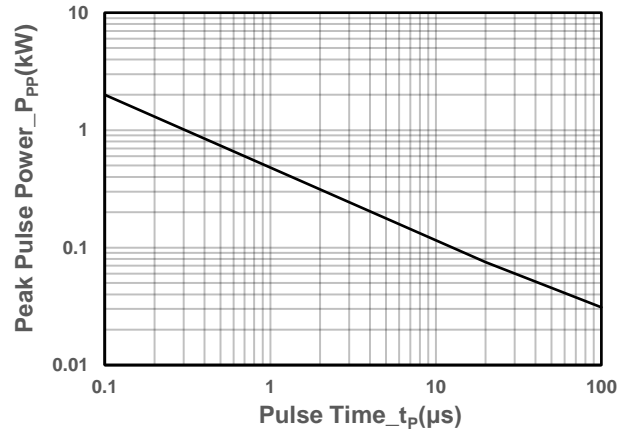


Peak Pulse Power vs. Pulse Time

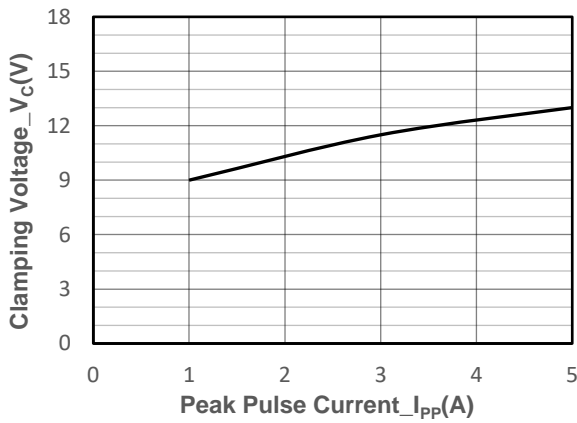

Clamping Voltage vs. Peak Pulse Current

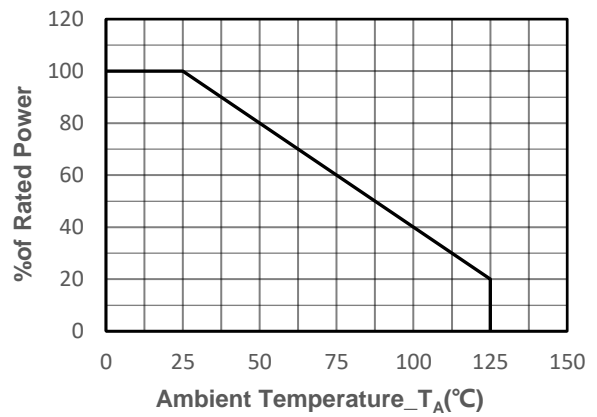

Power derating vs. Ambient temperature

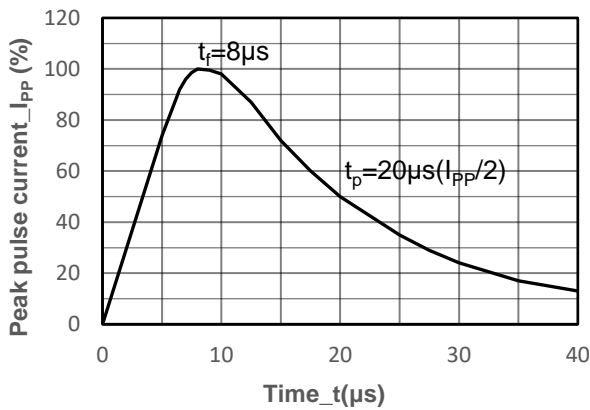

8/20 μ s Pulse Waveform



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V011SG	SOT-363	3000	7 Inch

Mechanical Data


Case: SOT-363

Case Material: Molded Plastic. UL Flammability

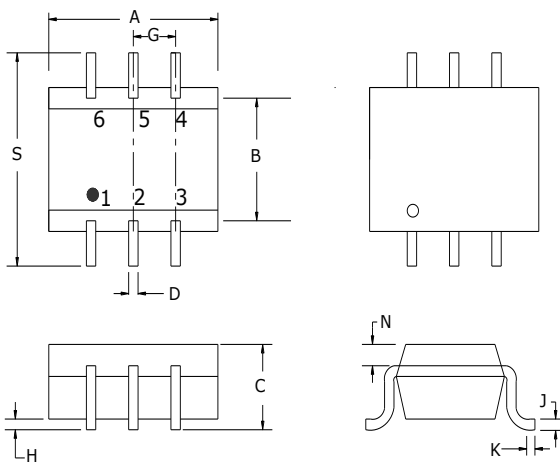

DIM	Millimeters		
	Min	Nom	Max
A	1.90	2.00	2.20
B	1.15	-	1.35
C	0.90	-	1.10
D	0.15	-	0.35
G	0.65BSC		
H	-	-	0.10
J	0.08	-	0.15
K	0.15	-	0.35
S	2.10	-	2.45
N	0.20REF		

Recommended Pad outline

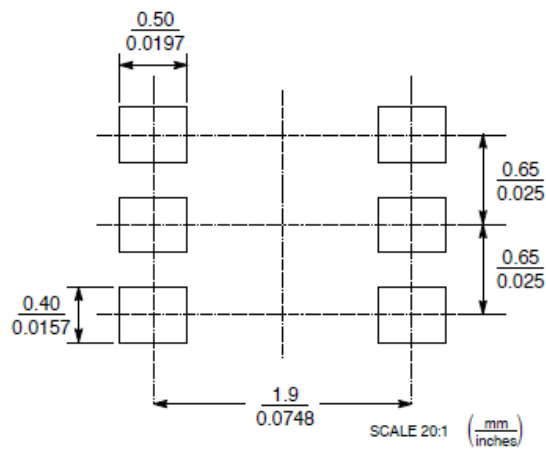



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.