



SSCE5V0A2N1

2-Lines Bi-directional TVS Diode

● Description

The SSCE5V0A2N1 is a 2 line of 5V bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line.

The small size and high ESD surge protection make SSCE5V0A2N1 an ideal choice to protect cellphone, digital cameras, audio players and many other portable applications.

● Features

- ✧ 72W peak pulse power ($t_p= 8/20\mu s$)
- ✧ Ultra low capacitance
- ✧ Working voltage: 5V
- ✧ Low clamping voltage
- ✧ 3-pin leadless package
- ✧ Low Leakage Current
- ✧ Complies with following standards:
 - IEC61000-4-2(ESD) $\pm 20kV$ (contact), $\pm 25kV$ (air)
 - IEC61000-4-4(EFT) 40A(5/50ns)
 - IEC61000-4-5(Lightning) 6A(8/20 μs)


● Mechanical Characteristics

- ✧ Package: DFN1006-3L (1.0x0.6x0.5mm)
- ✧ Lead Finish: NiPdAu
- ✧ Case Material: "Green" Molding Compound.
- ✧ UL Flammability Classification Rating 94V-0
- ✧ Moisture Sensitivity: Level 3 per J-STD-020

● PIN configuration



DFN1006-3L(Bottom View)



Circuit Diagram



Marking(Top View)


● Applications

- ✧ Cellular Handsets and Accessories
- ✧ Personal Digital Assistants
- ✧ Notebooks and Handhelds
- ✧ Portable Instrumentation
- ✧ Digital Cameras
- ✧ Audio Players, Keypads, Side Keys
- ✧ USB 2.0
- ✧ LCD Displays



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PPP}	Peak Pulse Power
C	Junction Capacitance

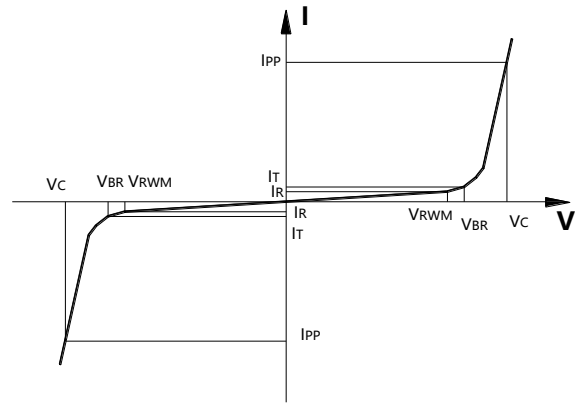

● Absolute maximum rating @TA=25°C


Parameter	Symbol	Value	Units
Peak Pulse Power (8/20μs)	P_{PP}	75	W
Peak Pulse Current (8/20μs)	I_{PP}	6	A
ESD Rating per IEC61000-4-2	Contact	±20	kV
	Air	±25	
Storage Temperature	T_{STG}	-55/+150	°C
Operating Temperature	T_J	-55/+125	°C

● Electrical Characteristics @TA=25°C


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$			0.05	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$, $t_p = 8/20\mu\text{s}$		8		V
Clamping Voltage	V_C	$I_{PP} = 6\text{A}$, $t_p = 8/20\mu\text{s}$			12	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$, Pin 1 or Pin 2 to Pin 3		10	15	pF




● Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

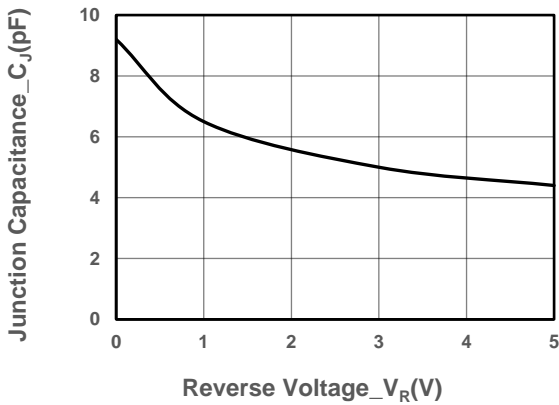


Junction Capacitance vs. Reverse Voltage

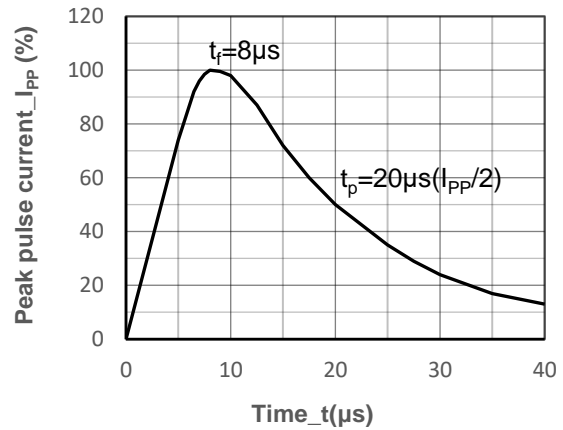


8/20 μs Pulse Waveform

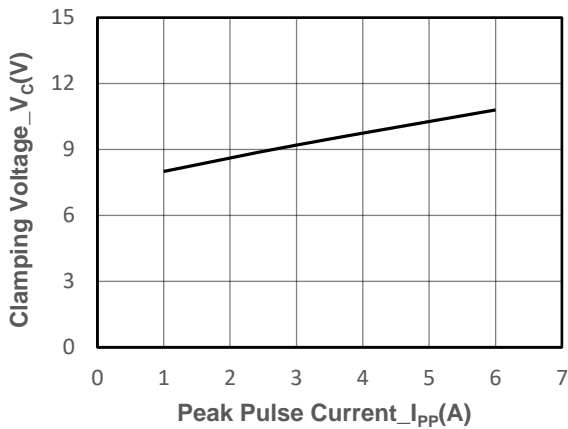


Clamping Voltage vs. Peak Pulse Current

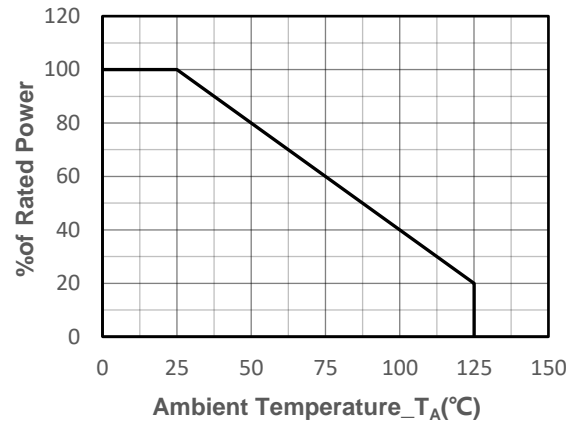

Power derating vs. Ambient temperature

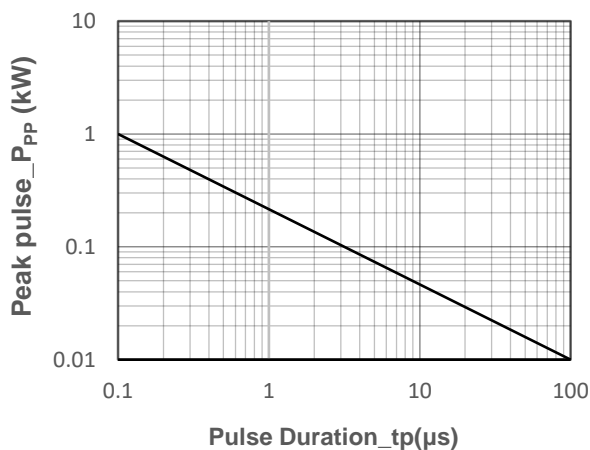

Peak Pulse Power vs. Pulse Time

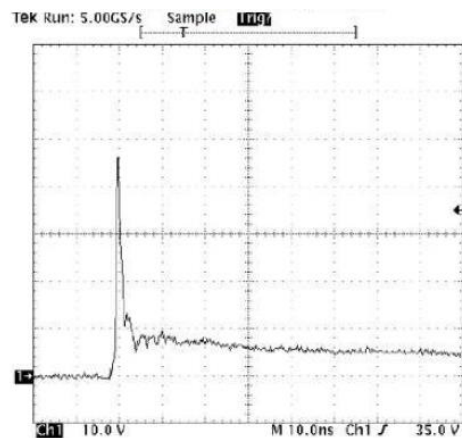

ESD Clamping Voltage
8 kV Contact per IEC61000-4-2



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V0A2N1	DFN1006-3L	10000	7 Inch

Mechanical Data


Case: DFN1006-3L

Case Material: Molded Plastic. UL Flammability

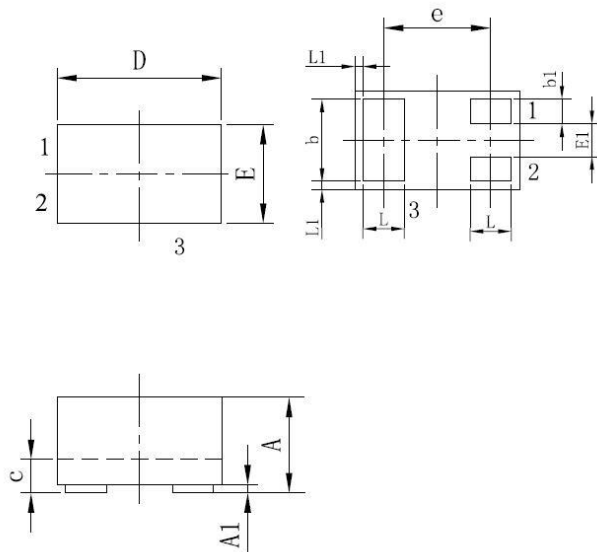

DIM	Millimeters		
	Min	Nom	Max
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.45	0.50	0.55
b1	0.10	0.15	0.20
c	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65 BSC		
E	0.55	0.60	0.65
E1	0.15	0.20	0.25
L	0.20	0.25	0.30
L1	0.05REF		

Suggested Land Pattern

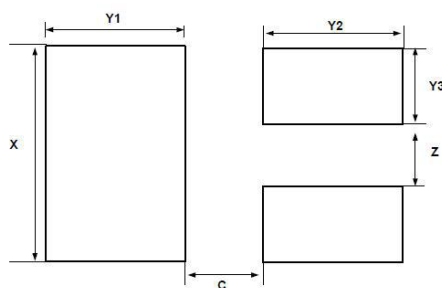

DIM	Millimeters
C	0.25
X	0.65
Y1	0.50
Y2	0.50
Y3	0.25
Z	0.20



DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AF SEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.