


## **SSCP80725GS6**

### **High Frequency High Gain PNP Power BJT**

#### ➤ Features

| VCB  | VCE  | VEB | IC    |
|------|------|-----|-------|
| -50V | -45V | -5V | -0.5A |


#### ➤ Pin configuration



**SOT-23**

#### ➤ Description


This device is produced with advanced high carrier density technology, which is especially used to minimize saturation voltage drop. This device particularly suits low voltage applications such as portable equipment, power management and other battery powered circuits, and low in-line power dissipation are needed in a very small outline surface mount package. Excellent thermal and electrical capabilities.

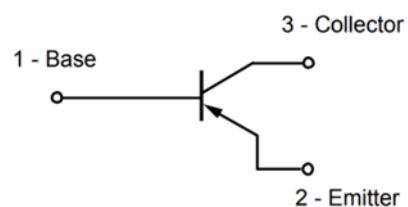

**Circuit Diagram**

#### ➤ Applications

- Supply line switching circuits
- Battery management application
- DC/DC converter applications



**Marking (Top View)**

#### ➤ Ordering Information

| Device       | Package | Shipping  |
|--------------|---------|-----------|
| SSCP80725GS6 | SOT-23  | 3000/Reel |









➤ Absolute Maximum Ratings( $T_A=25^\circ C$  unless otherwise noted)

| Parameter                                   | Symbol          | Value      | Unit |
|---|-----------------|------------|------|
| Collector-Base Voltage                      | $V_{CBO}$       | -50        | V    |
| Collector- Emitter Voltage                  | $V_{CEO}$       | -45        | V    |
| Emitter-Base Voltage                        | $V_{EBO}$       | -5         | V    |
| Collector Current-Continuous                | $I_C$           | -500       | mA   |
| Collector Power Dissipation                 | $P_C$           | 300        | mW   |
| Thermal resistance from junction to ambient | $R_{\theta JA}$ | 417        | °C/W |
| Junction Temperature                        | $T_J$           | 150        | °C   |
| Storage Temperature                         | $T_{STG}$       | -55 to 150 | °C   |


➤ Electrical Characteristics ( $T_A=25^\circ C$  unless otherwise noted)

| Parameter                            | Symbol        | Test Conditions                       | Min. | Typ. | Max. | Unit |
|--------------------------------------|---------------|---------------------------------------|------|------|------|------|
| Collector-Base Breakdown Voltage     | $BV_{CBO}$    | $I_C=-10\mu A, I_E=0$                 | -50  |      |      | V    |
| Collector-emitter Breakdown Voltage  | $BV_{CEO}$    | $I_C=-10mA, I_B=0$                    | -45  |      |      | V    |
| Emitter -Base Breakdown Voltage      | $BV_{EBO}$    | $I_E=-1\mu A, I_C=0$                  | -5   |      |      | V    |
| Collector Cutoff Current             | $I_{CBO}$     | $V_{CB}=-45V, I_E=0$                  |      |      | -0.1 | μA   |
| Emitter Cutoff Current               | $I_{EBO}$     | $V_{EB}=-4V, I_C=0$                   |      |      | -0.1 | μA   |
| DC Current Gain                      | $h_{FE}$      | $V_{CE}=-1V, I_C=-100mA$              | 160  |      | 400  |      |
|                                      |               | $V_{CE}=-1V, I_C=-500mA$              | 40   |      |      |      |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=-500mA, I_B=-50mA$               |      |      | -0.7 | V    |
| Base-Emitter Saturation Voltage      | $V_{BE(sat)}$ | $I_C=-500mA, I_B=-50mA$               |      |      | -1.2 | V    |
| Base-emitter Voltage                 | $V_{BE(ON)}$  | $V_{CE}=1V, I_C=500mA$                |      |      | 1.2  | V    |
| Transition frequency                 | $f_T$         | $V_{CE}=-5V, I_C=-10mA$<br>$f=100MHz$ | 100  |      |      | MHz  |

➤ Typical Performance Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise noted)

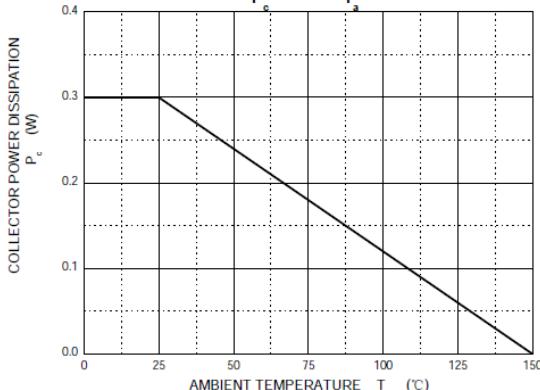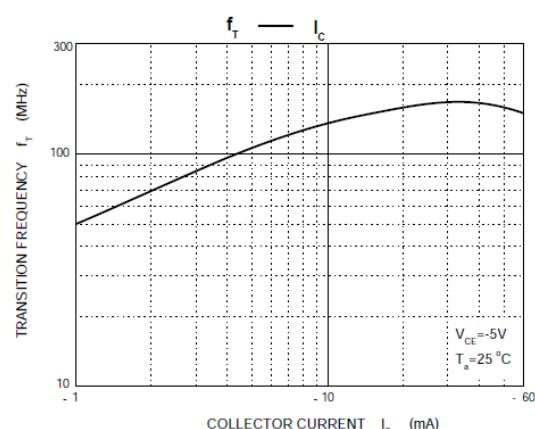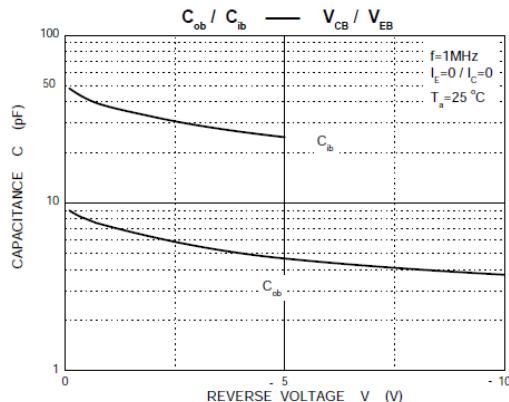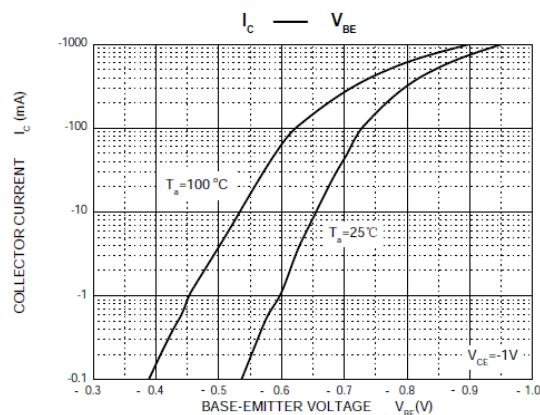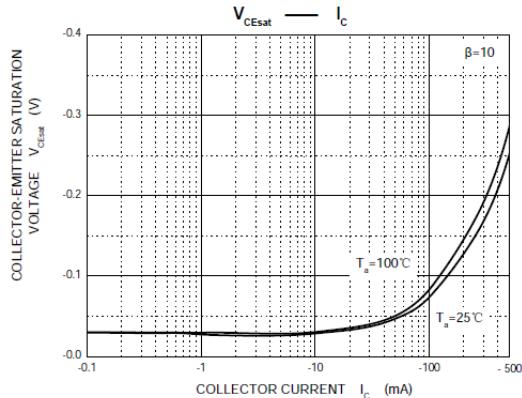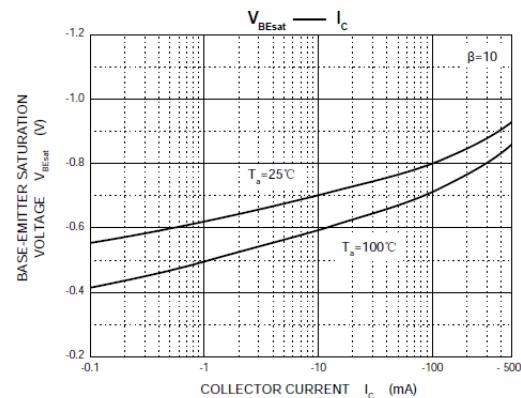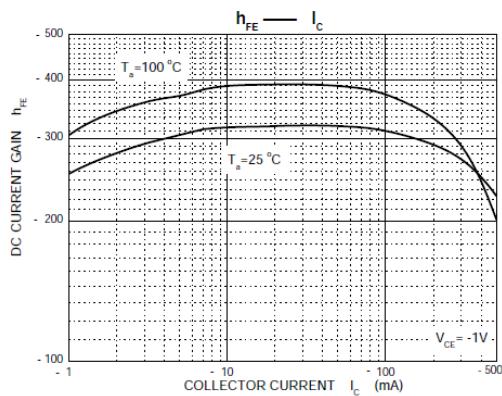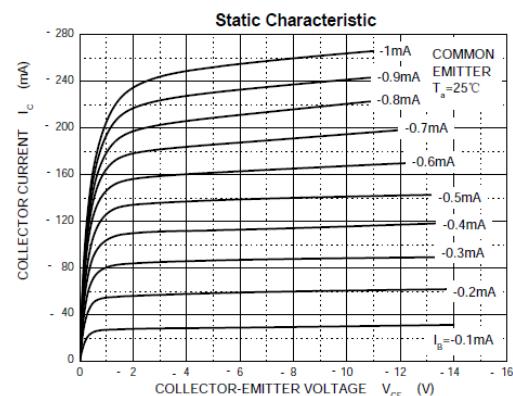


➤ Package Information

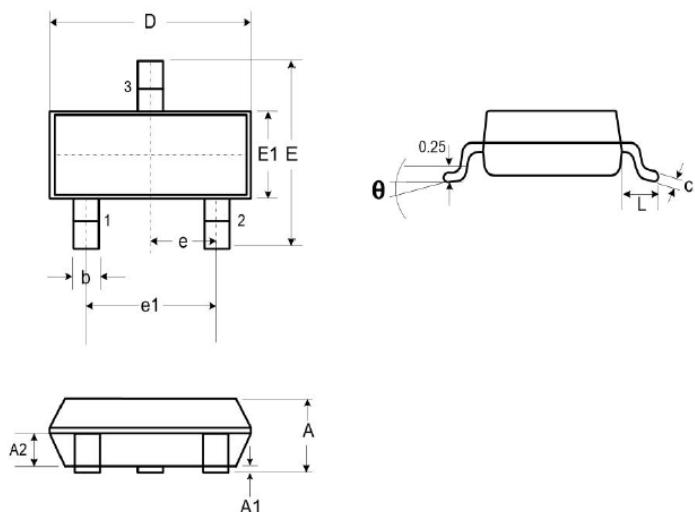

| DIM | Millimeters |      |      |
|-----|-------------|------|------|
|     | Min.        | Typ. | Max. |
| A   | 0.89        | -    | 1.12 |
| A1  | 0.01        | -    | 0.10 |
| A2  | 0.88        | 0.95 | 1.02 |
| b   | 0.30        | -    | 0.51 |
| c   | 0.08        | -    | 0.18 |
| D   | 2.80        | 2.90 | 3.04 |
| E   | 2.10        | 2.37 | 2.64 |
| E1  | 1.20        | 1.30 | 1.40 |
| e   |             | 1.90 |      |
| e1  |             | 0.95 |      |
| L   | 0.40        | 0.50 | 0.60 |
| L1  |             | 0.55 |      |
| N   |             | 3    |      |
| θ   | 0°          | -    | 8°   |

Recommended Pad outline (Unit: mm)

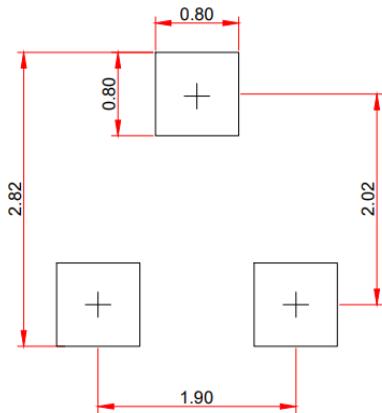

**DISCLAIMER**

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.