



SSCE5V0N2L1

Ultra-low Capacitance Bidirectional Micro Packaged TVS Diodes for ESD Protection


● Description

The SSCE5V0N2L1 is a bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The SSCE5V0N2L1 has an ultra-low capacitance with a typical value at 0.09pF, and complies with the IEC 61000-4-2 (ESD) with $\pm 25\text{kV}$ air and $\pm 20\text{kV}$ contact discharge. It is assembled into an ultra-small 0.6x0.3x0.28mm lead-free DFN package. Also because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed, USB 3.0 super speed, VGA, DVI, HDMI, SDI and other high speed line applications.


● Feature

- ✧ 60W peak pulse power ($t_P = 8/20\mu\text{s}$)
- ✧ DFN0603-2L Package
- ✧ Working voltage: 5V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ RoHS compliant transient protection for high speed data lines to IEC61000-4-2(ESD) $\pm 25\text{kV}$ (air), $\pm 20\text{kV}$ (contact)

● PIN configuration



Top view



Marking

x: Periodic code

● Applications

- ✧ DVI & HDMI Port Protection
- ✧ USB 2.0 and USB 3.0
- ✧ SATA and eSATA
- ✧ Serial and Parallel Ports
- ✧ Projection TV
- ✧ Notebooks, Desktops, Servers


● Mechanical data

- ✧ Lead finish: 100% matte Sn(Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: $7 \sim 17 \mu\text{m}$
- ✧ Pin flatness: $\leq 3\text{mil}$



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

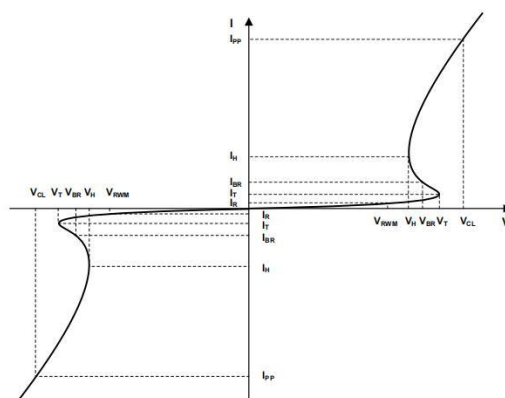

● Absolute maximum rating @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PP}	60	W
Peak Pulse Current (8/20 μs)	I_{PP}	5	A
ESD Rating per IEC61000-4-2:			
Contact	V_{ESD}	20	kV
Air		25	
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$

● Electrical Characteristics @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6		10	V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$			0.1	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$		5.8	8	V
Clamping Voltage	V_C	$I_{PP} = 5\text{A}$, $t_P = 8/20\mu\text{s}$		8	12	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$		0.09	0.125	pF




● Typical Performance Characteristics

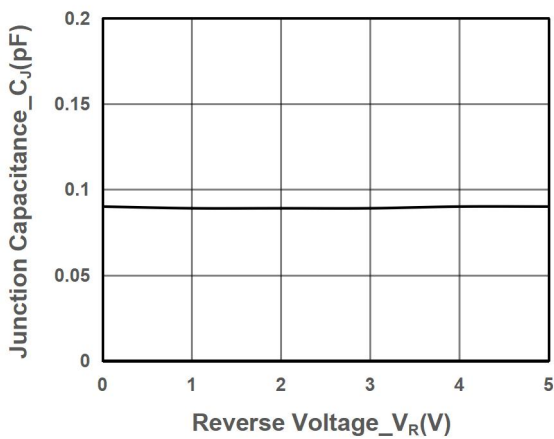


Junction Capacitance vs. Reverse Voltage

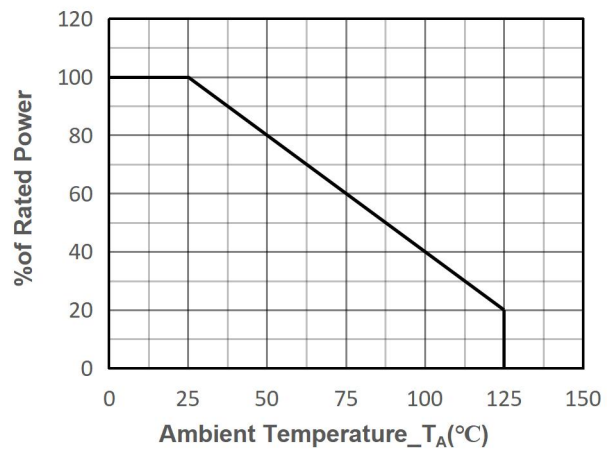


Power derating vs. Ambient temperature

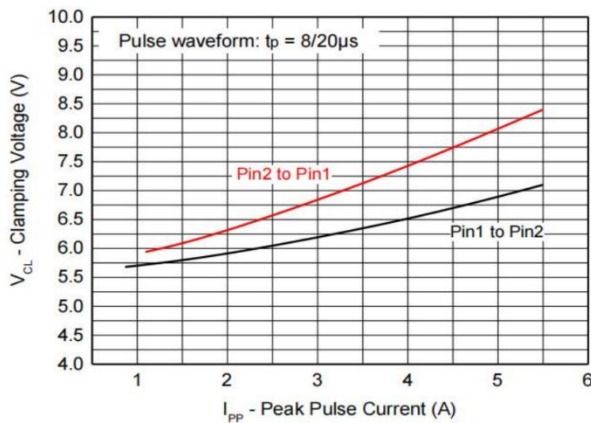


Clamping Voltage vs. Peak Pulse Current

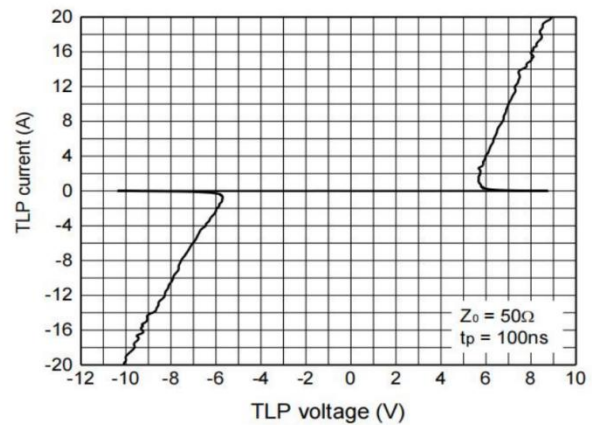

TLP IV Curve

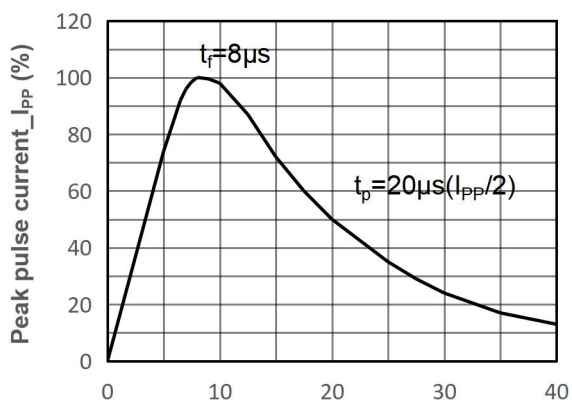

8/20µs Pulse Waveform

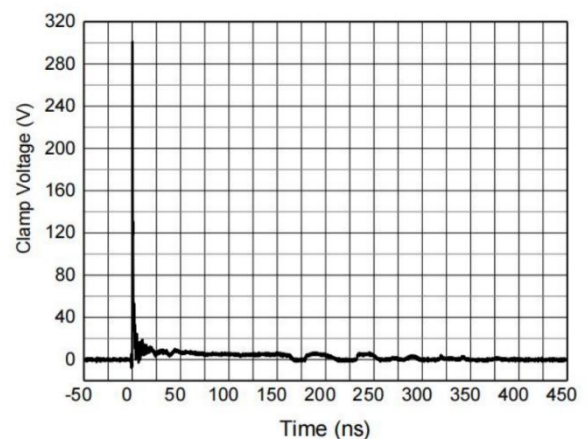

Note: Data is taken with a 10x attenuator
ESD Clamping Voltage + 8kV contact per
IEC61000-4-2



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V0N2L1	DFN0603-2L	15000	7 Inch

Mechanical Data


Case:DFN0603-2L

Case Material: Molded Plastic. UL Flammability

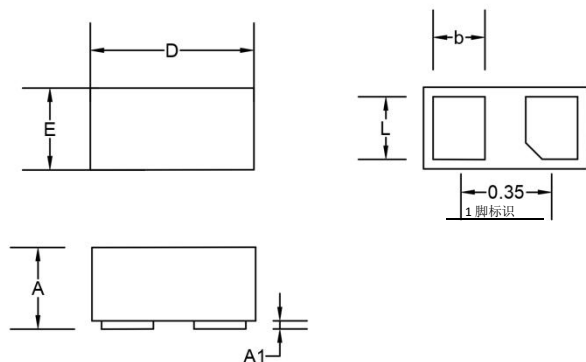

DIM	Millimeters		
	Min	Nom	Max
A	0.23	0.30	0.35
A1	0.00	0.03	0.05
b	0.115	0.19	0.25
D	0.55	0.60	0.67
E	0.250	0.30	0.37
L	0.18	0.23	0.30
e	0.35Ref		

Recommended Pad outline (Unit: mm)

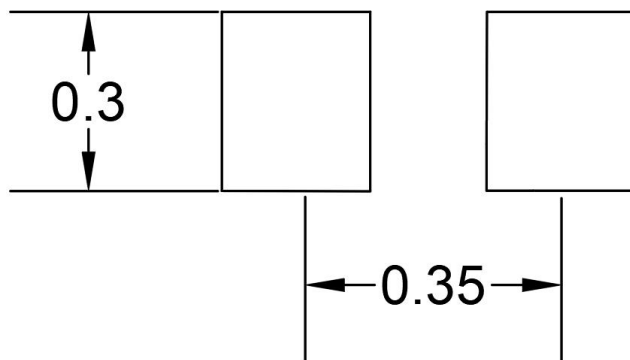



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.