



SSCE5V0B2N1

1-Line Bidirectional Micro Packaged TVS Diodes for ESD Protection


● Description

The SSCE5V0B2N1 is a bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The SSCE5V0B2N1 complies with the IEC 61000-4-2 (ESD) with ± 30 kV air and ± 30 kV contact discharge. It is assembled into an ultra-small 1.0x0.6x0.5mm lead-free DFN package. The small size and high ESD surge protection make SSCE5V0B2N1 an ideal choice to protect cell phone, digital cameras, and many other portable applications.

● Feature

- ✧ 210W peak pulse power ($t_P = 8/20\mu s$)
- ✧ DFN1006-2L Package
- ✧ Working voltage: 5.0V
- ✧ Low clamping voltage
- ✧ Low capacitance (Max value: 1.55pF)
- ✧ Low clamping voltage
- ✧ RoHS compliant
- ✧ Complies with following standards:
 - IEC61000-4-2(ESD) ± 30 kV(contact),
 ± 30 kV(air)
 - IEC61000-4-5 (Lightning) 15A (8/20 μs)

● PIN configuration



Top View



Marking

● Applications

- ✧ Cellular Handsets and Accessories
- ✧ Notebooks and Handhelds
- ✧ Portable Instrumentation
- ✧ Digital Cameras
- ✧ Peripherals
- ✧ Audio Players
- ✧ Keypads, Side Keys, USB, LDC Displays


● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17 μm
- ✧ Pin flatness: ≤ 3 mil



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power

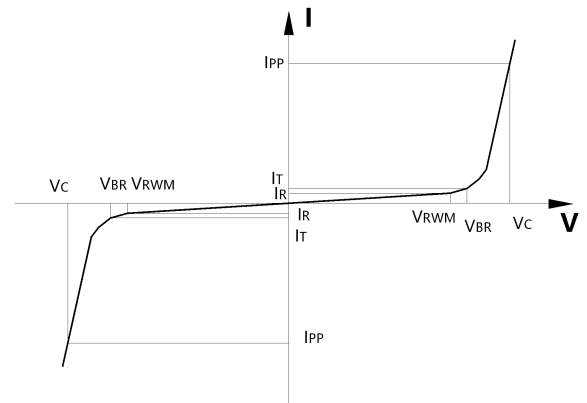

● Absolute maximum rating @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PP}	210	W
Peak Pulse Current (8/20 μs)	I_{PP}	15	A
ESD Rating per IEC61000-4-2:	V_{ESD}	30	kV
		30	
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$
Lead Solder Temperature – Maximum (10 Second Duration)	T_L	260	$^{\circ}\text{C}$

● Electrical Characteristics @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6	7.5		V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$		1	50	nA
Clamping Voltage ³⁾	V_{CL}	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$		8		V
		$I_{PP} = 15\text{A}, t_p = 8/20\mu\text{s}$		12	14	V
Clamping Voltage ¹⁾	V_{CL}	$I_{PP} = 16\text{A}, t_p = 100\text{ns}$		12		V
Dynamic resistance ¹⁾	R_{DYN}			0.3		Ω
Clamping Voltage ²⁾	V_{CL}	$V_{ESD} = 8\text{kV}$		9		V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$		1.35	1.55	pF




● Typical Performance Characteristics

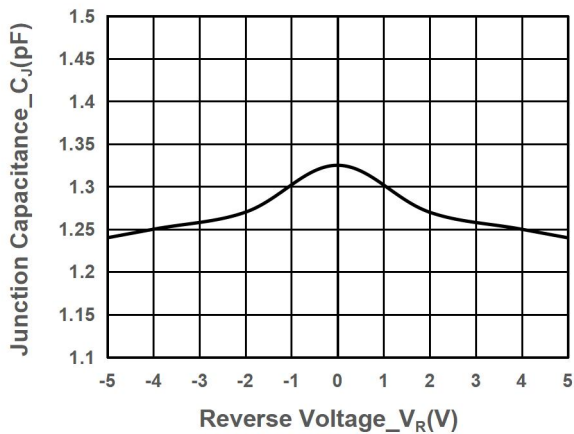


Junction Capacitance vs. Reverse Voltage

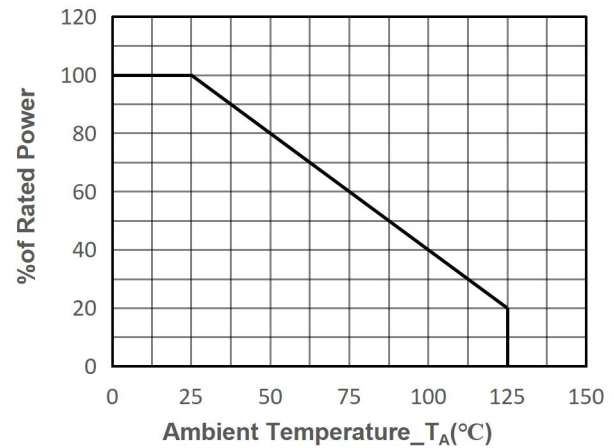

Peak Pulse Power vs. Pulse Time

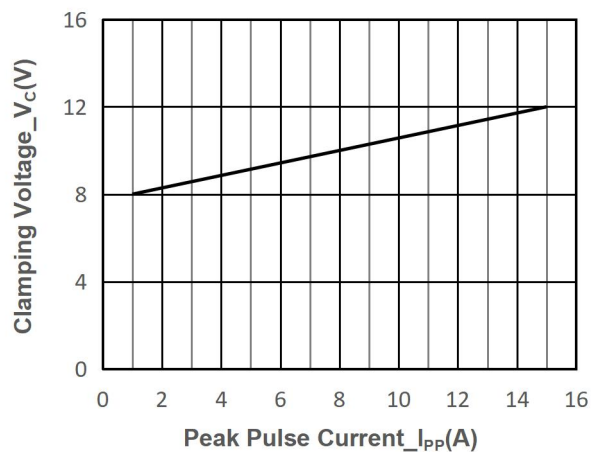

Clamping Voltage vs. Peak Pulse Current

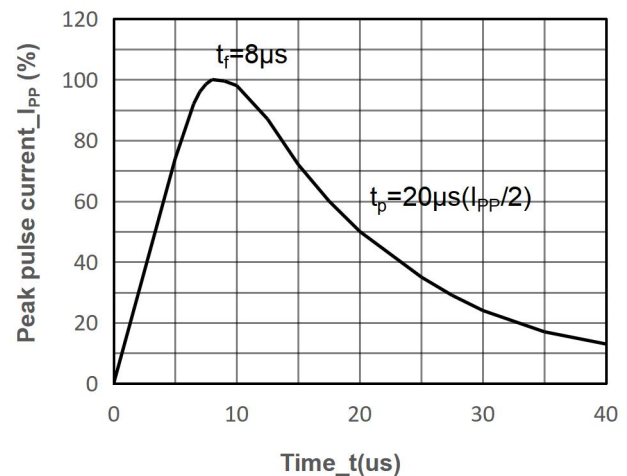

8/20 μs Pulse Waveform



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V0B2N1	DFN1006-2L	10000	7 Inch

Mechanical Data


Case: DFN1006-2L

Case Material: Molded Plastic. UL Flammability

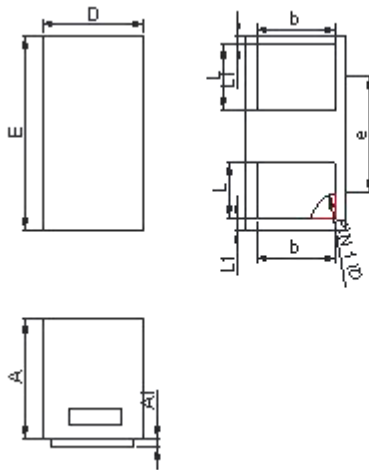


DIM	Millimeters	
	Min	Max
A	0.43	0.55
A1	0.00	0.05
D	0.55	0.65
E	0.95	1.05
b	0.45	0.60
e	0.65TYP	
L	0.2	0.3
L1	0.05REF	

Recommended Pad outline (Unit: mm)

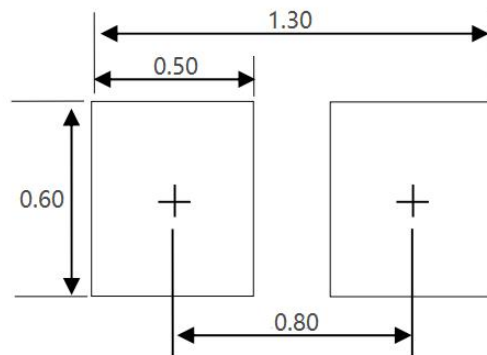


Unit:mm

● Type and Reel Information-DFN1006-2L

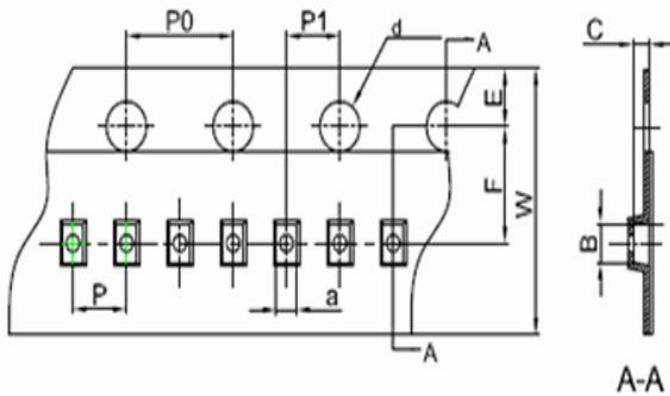


DIM	Millimeters
	Typ
a	0.68
B	1.14
C	0.58
d	Φ 1.55
E	1.75
F	3.50
P0	4.00
P	2.00
P1	2.00
W	8.00

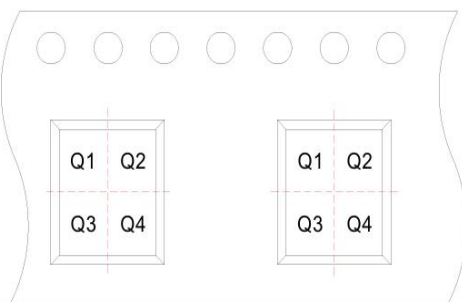

User direction of feed

Pin 1 Quadrant: Q1&Q2

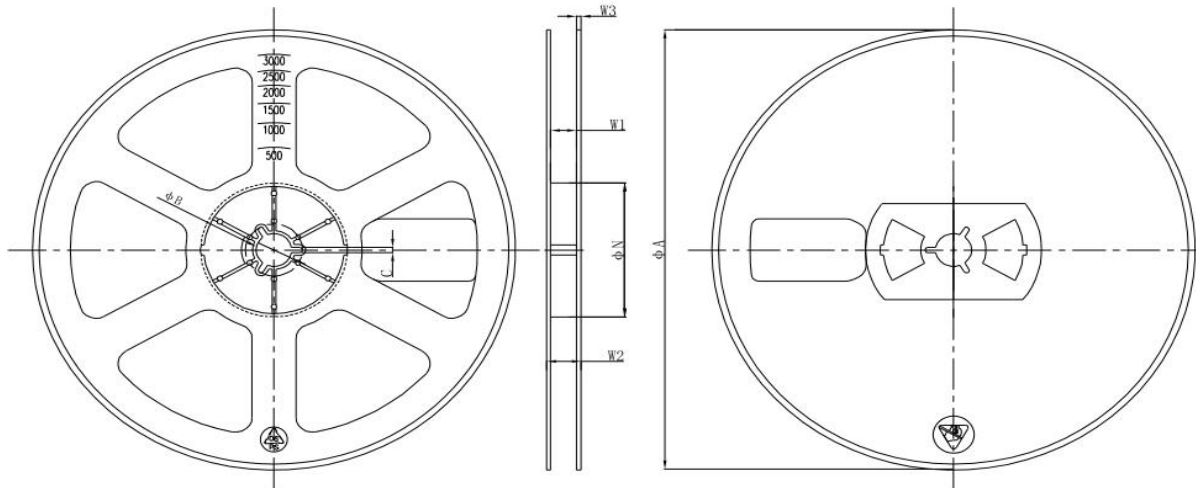

ΦA	ΦN	ΦB	C	W1	W2	W3
178mm	54mm	13.2mm	2.2mm	9.5mm	13 _{max} mm	1.4mm



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.