

SSCSBAV20D2

SSCSBAV20D2

Fast Switching Diode

• Features

- ♦ Fast Switching Speed
- ♦ Ultra-Small Surface Mount Package
- ♦ Low Reverse Leakage Current
- ♦ Ideal for Battery Powered Portable Applications
- ♦ RoHS Compliant/Green EMC
- ♦ Moisture Sensitivity: Level 3 per J-STD-020



PIN configuration






Circuit Diagram



- ♦ High speed switching for detection
- ♦ Battery Powered Portable
- ♦ Mobile phones, laptops and other electronic devices



• Absolute maximum rating @T_A=25°C

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	200	V
Repetitive Peak Reverse Voltage Working Peak Reverse Voltage	V _{RRM} Vrwm	150	V
RMS Reverse Voltage	VR(RMS)	106	V
Average Rectified Forward Current	lo	200	mA
Non-Repetitive Peak Forward Surge Current@ t=8.3ms	IFSM	2	А
Power Dissipation	PD	250	mW
Thermal Resistance from Junction to Ambient	R _{θJA}	500	°C/W
Operating Temperature	TJ	-55 ~ +150	°C
Storage Temperature	Tstg	-55 ~ +150	°C




SSCSBAV20D2

• Electrical Characteristics @T_A=25°C

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Reverse Voltage	V _{R1}	I _R = 100μA	150			V
Forward Voltage V _F	N	I _F = 100mA			1	V
	VF	I _F = 200mA			1.25	v
Reverse Current	IR	V _R = 200V			0.1	uA
Total Capacitance	Ст	$V_R = 0, f = 1MHz$			5	pF
Reverse Recovery Time	t _{rr}	$I_F = I_R = 30 mA$,		50	50	ns
		$I_{rr} = 0.1 \text{ x } I_R, R_L = 100 \Omega$			50	

• Typical Performance Characteristics

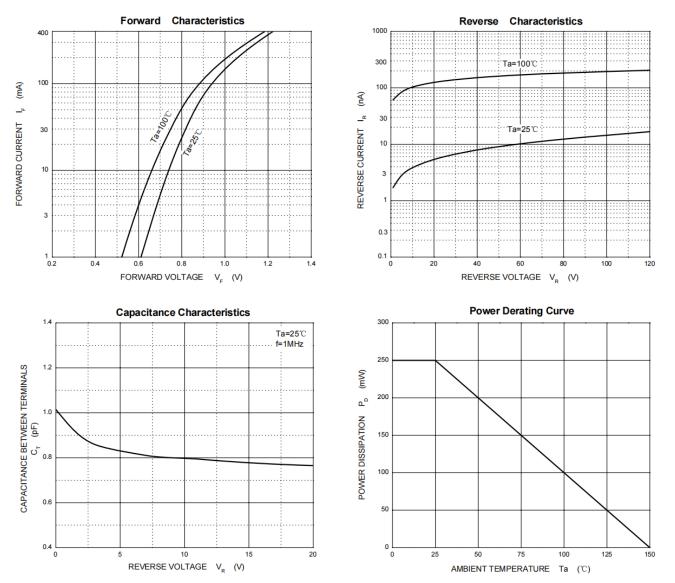



Package Information

SSCSBAV20D2

Ordering Information


Device	Package	Marking	Qty per Reel	Reel Size
SSCSBAV20D2	SOD-323	T2	3000	7 Inch


·Е

Mechanical Data

Case: SOD-323


Case Material: Molded Plastic. UL Flammability





Dim	Millimeters		
	Min	Max	
Α	1.60	1.80	
в	1.2	1.40	
С	0.80	0.90	
D	0.25	0.35	
E	0.15REF		
Н	0	0.10	
J	0.08	0.15	
к	2.50	2.70	

Recommended Pad outline (Unit: mm)





DISCLAIMER

AFSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. AFSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.