



SSCE3V312D3

1-line Bidirectional Micro Packaged TVS Diodes for ESD Protection

● Description

The SSCE3V312D3 is designed to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium.

It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), and EFT (electrical fast transients).


● Feature

- ✧ 400W peak pulse power ($t_P = 8/20\mu s$)
- ✧ SOD-523 Package
- ✧ Working voltage: 3.3V
- ✧ Making: 3CM
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ Response Time is $< 1\text{ ns}$
- ✧ RoHS compliant
- ✧ IEC61000-4-2(ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact)
- ✧ IEC61000-4-4(EFT)40A(5/50ns)
- ✧ IEC61000-4-5(Surge)23A(8/20 μs)

● PIN configuration



SOD-523



Top View

● Applications

- ✧ Cellular handsets and accessories
- ✧ Portable instrumentation
- ✧ Peripherals
- ✧ Serial and Parallel Ports
- ✧ Notebooks, Desktops, Servers
- ✧ Projection TV


● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17 μm
- ✧ Pin flatness: $\leq 3\text{mil}$



● Electronic Parameter

| Symbol | Parameter |
|-----------|-------------------------------------|
| V_{RWM} | Peak Reverse Working Voltage |
| I_R | Reverse Leakage Current @ V_{RWM} |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| P_{PP} | Peak Pulse Power |
| C_J | Junction Capacitance |

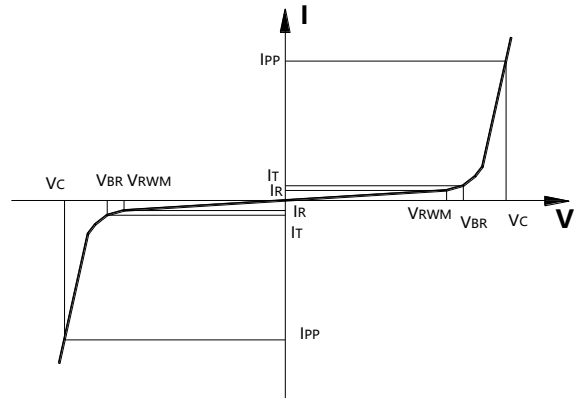

● Absolute maximum rating @TA=25°C


| Parameter | Symbol | Value | Unit |
|------------------------------|-----------|----------|------|
| Peak Pulse Power (8/20us) | P_{PP} | 400 | W |
| Peak Pulse Current (8/20us) | I_{PP} | 23 | A |
| ESD Rating per IEC61000-4-2: | Contact | 30 | KV |
| | Air | 30 | |
| Storage Temperature | T_{STG} | -55/+150 | °C |
| Operating Temperature | T_J | -55/+125 | °C |

● Electrical Characteristics @TA=25°C


| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|-----------|---------------------------------|------|------|------|---------|
| Peak Reverse Working Voltage | V_{RWM} | | | | 3.3 | V |
| Breakdown Voltage | V_{BR} | $I_T = 1mA$ | 3.8 | | 6 | V |
| Reverse Leakage Current | I_R | $V_{RWM} = 3.3V$ | | | 0.1 | μA |
| Clamping Voltage | V_C | $I_{PP} = 1A, t_P = 8/20\mu s$ | | | 6.5 | V |
| Clamping Voltage | V_C | $I_{PP} = 23A, t_P = 8/20\mu s$ | | 13 | 18 | V |
| Junction Capacitance | C_J | $V_R = 0V, f = 1MHz$ | | 35 | 50 | pF |




● Typical Performance Characteristics

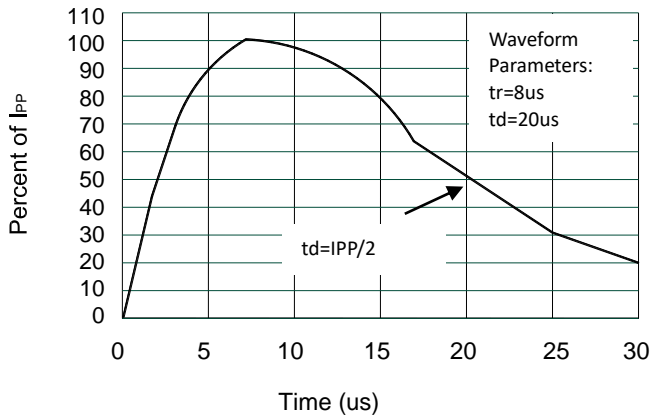


Pulse Waveform

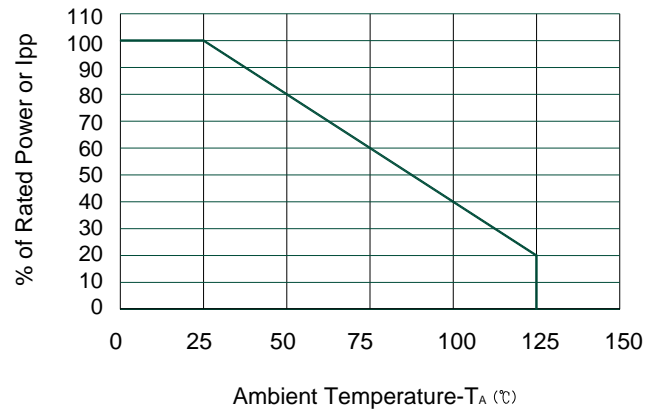

Power Derating Curve

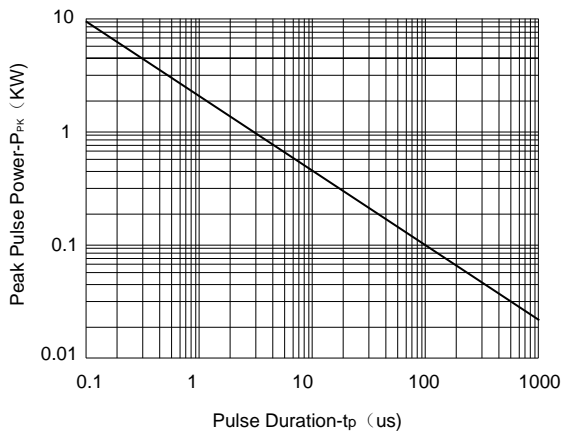

Non-Repetitive Peak Pulse Power vs. Pulse Time

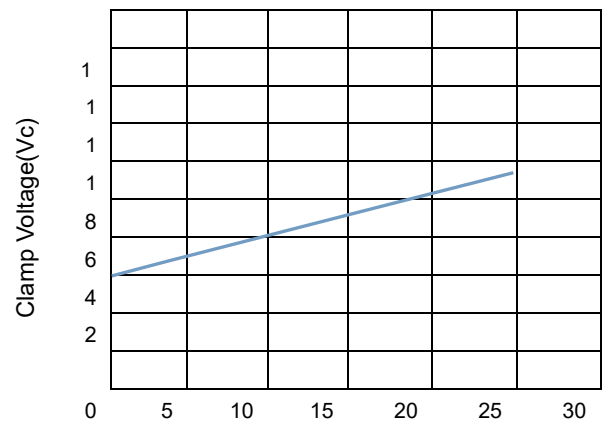



● Package Information


Ordering Information

| Device | Package | Qty per Reel | Reel Size |
|-------------|---------|--------------|-----------|
| SSCE3V312D3 | SOD-523 | 3000 | 7 Inch |

Mechanical Data


Case: SOD-523

Case Material: Molded Plastic. UL Flammability

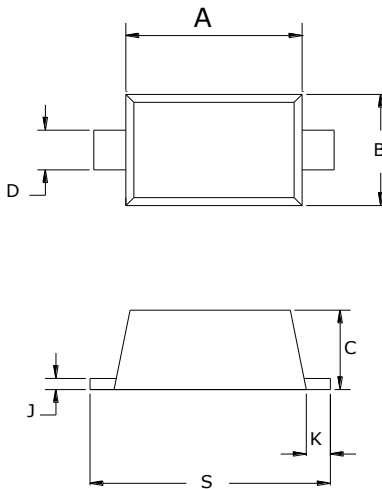

| DIM | Millimeters | |
|-----|-------------|------|
| | Min | Max |
| A | 1.10 | 1.30 |
| B | 0.75 | 0.85 |
| C | 0.51 | 0.70 |
| D | 0.25 | 0.35 |
| J | 0.08 | 0.15 |
| K | 0.15 | 0.25 |
| S | 1.50 | 1.70 |

Recommended Pad outline (mm)

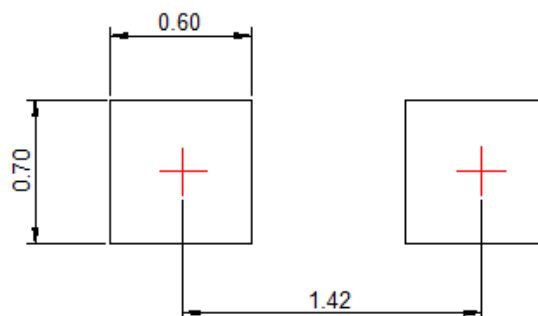



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.